Smooth Bore Clean Coiled Tubing

Smooth Bore Clean Coiled Tubing

- Standard instrument tubing
- Thermocouple-cleaned tubing
- TrueTube™ Chemically cleaned and passivated tubing
- TrueTube Electropolished and Sulfinert coated tubing
- Straightening and pay-out tools

Features

- Available in sizes from 1/8 to 1/2 inch and 3 to 12 mm outside diameter
- 316 / 316L seamless stainless steel
- Reduces leak potential leak points
- Reduce installation time by up to 55%
- Reduce up to 80% of scrap

Pressure Ratings

Pressure ratings are not affected by coiled configuration.

Standard Commercial Grade & Thermocouple Cleaned Tubing

Available in seamless and welded tubing.

Materials Standards

Grade	UNS	ASTM[1]	ASME[1]
316 / 316L	S31600 / S31603	A213 / A269	SA213

[1] Nominal wall thickness, not minimum wall thickness.

TrueTube™ Smooth Bore, Electropolished and Coated Tubing

Available in seamless tubing.

Materials Standards

Grade	UNS	ASTM[1]	ASME[1]
316 / 316L	S31603	A269	SA213

[1] Nominal wall thickness, not minimum wall thickness.

Smooth Bore Clean Coiled Tubing

Available Sizes

Coiled Tubing	1/8 x 0.020	1/8 x 0.035	1/4 x 0.035	1/4 x 0.049	3/8 x 0.035	3/8 x 0.049	1/2 x 0.035	1/2 x 0.049	1/2 x 0.065	6 x 1mm	8 x 1mm	10 x 1 mm	10 x 1.5mm	12 x 1mm	12 x 1.5mm
Commercial Grade	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
Thermocouple Cleaned - Commercial	X	X	X	X	X	X	X	X	X	X	X	X	X	X	X
TrueTube CP - Chemiclly polished & passivated	X		X		X			X		X					
TrueTube FS - Chem polished with Silcosteel coating	X		X		X			X		X					
TrueTube EP - Electropolished	X		X		X			X		X					
TrueTube EPS - Electropolished with Sulfinert coating	X		X		X			X		X					

Straightener

The manual five roll straighter is a portable hand tool. Using multiple passes in the 3, 6, 9 and 12 o'clock positions straight lengths of 1/8" to 1/2" tubing can be created to any length. The straightening tool opens in the center so it can be used to straighten tubing in tray spaces or tubing racks.

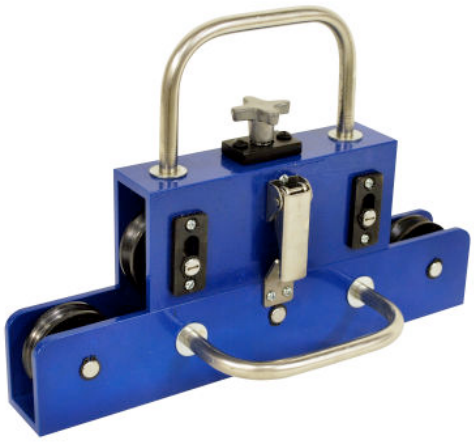

© 2014, by AMETEK, Inc. All rights reserved • QLT-SBCC • 14 APR 14